

(19) World Intellectual Property Organization
International Bureau



506662
10/506662
Rec'd PCT/PTO 03 SEP 2004



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/074855 A2

(51) International Patent Classification⁷: F02D 9/06

(21) International Application Number: PCT/CA03/00305

(22) International Filing Date: 4 March 2003 (04.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/361,280 4 March 2002 (04.03.2002) US

(71) Applicant (for all designated States except US): JENARA
ENTERPRISES LTD. [CA/CA]; 19594 - 96th Avenue,
Surrey, British Columbia V4N 4C3 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ISRAEL, Mark,

A. [US/US]; 53 Country Corners Road, Amherst, MA
01002 (US). HARTLEY, John, P. [US/US]; 8894 Giles
Road, Blaine, WA 98230 (US). MENEELY, Vincent,
A. [CA/CA]; 9837 McKinnon Crescent, R.R. No. 10,
Langley, British Columbia V3A 6Y5 (CA).


(74) Agent: CAMERON, Norman, M.; 1401 - 1166 Alberni
Street, Vancouver, British Columbia V6E 3Z3 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR RETARDING AN ENGINE WITH AN EXHAUST BRAKE AND A COMPRESSION RELEASE BRAKE

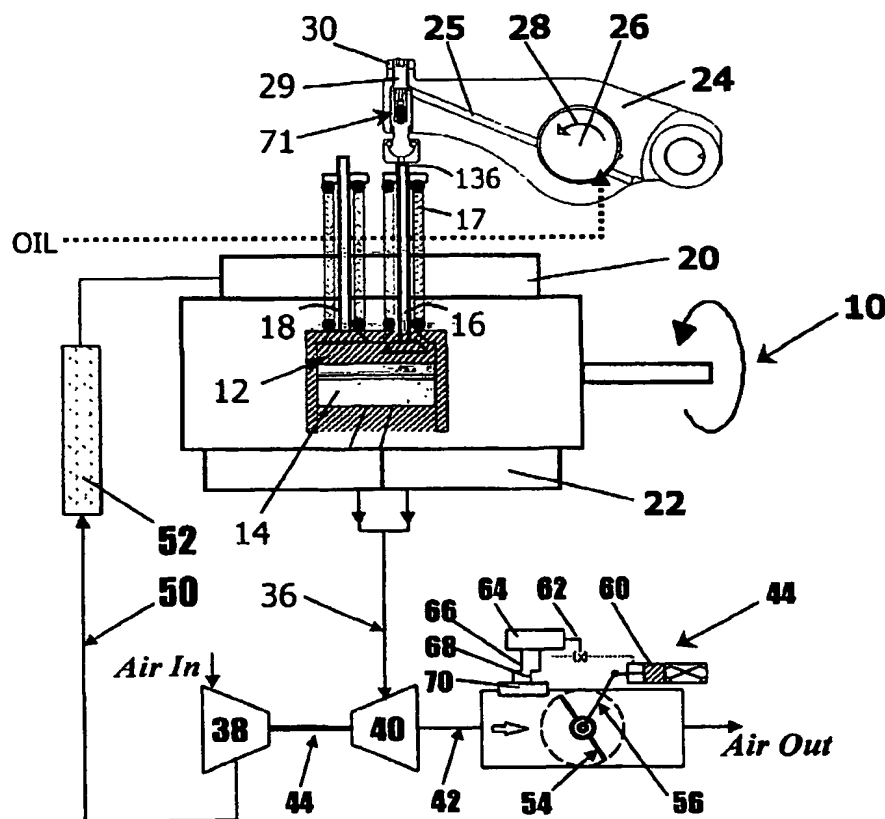

(57) Abstract: An apparatus and method for retarding an engine having a cylinder with an exhaust valve, an intake valve, an intake stroke, an exhaust stroke, a compression stroke and an expansion stroke. The apparatus includes an exhaust brake and a compression release brake. The exhaust brake includes a variable exhaust restrictor, a pressure sensor for sensing pressure of exhaust gases and a controller operatively connected to the pressure sensor and to the exhaust restrictor. Opening of the exhaust restrictor is adjusted during operation of the apparatus so exhaust pressure is sufficient to cause exhaust valve float prior to bottom dead center of intake strokes of the cylinder, thereby enhancing operation of the compression release brake.

WO 03/074855 A2



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

APPARATUS AND METHOD FOR RETARDING AN ENGINE WITH AN EXHAUST BRAKE AND A COMPRESSION RELEASE BRAKE

BACKGROUND OF THE INVENTION

5

This invention relates to methods and apparatuses for retarding engines and, in particular, to compression release brakes, such as bleeder brakes, and to exhaust brakes.

10

Conventional compression release brakes retard engines by opening the exhaust valves just prior to Top Dead Center (TDC) of the compression stroke. This creates a blow-down of the compressed cylinder gas and the energy used for compression is not reclaimed. The result is engine braking, or retarding, power. This type of brake has substantial cost associated with the hardware required to open the exhaust valves against the extremely high load of the compressed cylinder charge. The valve train components must be designed and manufactured to operate reliably at high mechanical loading. Also, the sudden release of the highly compressed gas causes high noise levels. This means that engine brakes cannot be used in certain areas, typically urban areas, leading to a potential safety hazard.

15

20

The power generated by an engine brake is directly proportional to the mass of air that is charged into the cylinder before compression. On a conventional system, the turbocharger compressor provides this air. It is beneficial, therefore, to keep the turbocharger speed as high as possible to maximize cylinder charge. Braking power may fall off sharply at reduced engine speeds, when the turbocharger slows down and delivers less air to the cylinder.

25

30

Exhaust brakes can be used on engines where compression release loading is too great for the valve train. The exhaust brake mechanism conventionally consists of a restrictor element mounted in the exhaust system. When this restrictor is closed, back pressure resists the exit of gases during the exhaust cycle and provides a braking function. The system provides less braking power than a compression release brake, but is also less costly. As with a compression release brake, the retarding power of an exhaust brake falls off sharply as engine speed decreases. This happens because the restriction is normally

- 2 -

optimized to generate maximum allowable back pressure at rated engine speed. The restriction is simply insufficient to be effective at lower engine speeds.

United States Patent No. 5,086,738 to Meneely discloses a system to enhance engine
5 braking power by combining an exhaust brake with a compression release brake. With
both brakes on, a high-pressure pulse from an adjacent cylinder in the same exhaust
manifold superimposes on the raised average exhaust pressure. Enough force is generated
to temporarily open the exhaust valves against the exhaust valve spring preload. This
opening by overcoming the valve springs is referred to as "valve float". This occurs
10 naturally around the end of the intake stroke. The high-pressure gas in the exhaust
manifold supercharges the cylinder through the open exhaust valve just before the brake
event. Compression begins at a higher cylinder pressure and is compressed to a higher
peak value for the blow-down. In addition, an exhaust brake component is provided by
virtue of the high exhaust pressure with the operation of the exhaust brake. This
15 approach is mainly effective only at high engine speeds as the conditions for valve float
diminish quickly as engine speed decreases.

United States Patent No. 6,170,474 to Israel discloses a method for exhaust pressure
regulation by controlling an internal exhaust gas recirculation process. The control is
20 carried out responsive to monitored levels of exhaust pressure and/or temperature. A
restriction is provided in the exhaust system to raise exhaust pressure. A reopening of
the engine exhaust valves is introduced to provide a passage for exhaust gas to re-enter
the cylinder from the exhaust manifold. This simultaneously relieves exhaust system
pressure and supercharges the cylinder for engine braking. By controlling the timing and
25 magnitude of this event, exhaust pressure is regulated.

Retarding power on the order of the rated power of the engine can be achieved by
combining a bleeder brake with an exhaust brake. United States Patent No. 5,215,054 to
Meneely incorporates a catch mechanism that holds the exhaust valve open at the end of
30 the exhaust stroke, at the level required to bleed the cylinder during the compression
stroke.

- 3 -

Further gains in retarding power can be attained with a combination of a bleeder-exhaust brake by raising the exhaust pressure to where natural valve float occurs. United States Patent No. 5,787,858 to Meneely uses this technique to supercharge the cylinder prior to the compression stroke. The valve is reseated near the end of the compression stroke by means of electronic triggering of a solenoid valve.

A Microprocessor Controlled Exhaust Brake is disclosed in PCT Publication No. WO 02/086300 to Anderson et al. Here the opening of the exhaust brake is regulated according to the exhaust pressure and, in some embodiments, according to the exhaust temperature. A controller, acting through a solenoid, adjusts the exhaust brake, typically a butterfly valve.

Despite these earlier devices, however, there still remains a significant need for a low-cost engine braking system that can be integrated into an overall engine design. A practical system should provide sufficient retarding power without overloading the mechanical and thermal components of the engine. It should provide mass charging to the cylinders from the intake and exhaust subsystems prior to the compression and release events that is sufficient to generate optimum retarding power at all engine speeds. It should also provide quiet operation so as to be useful in environments sensitive to noise pollution. Therefore, a means of regulating exhaust pressure must also be provided.

SUMMARY OF THE INVENTION

According to one aspect of the invention, an apparatus for retarding an engine has a cylinder with an exhaust valve, an intake valve, an intake stroke, an exhaust stroke, a compression stroke and an expansion stroke. The apparatus includes an exhaust brake and a compression release brake. The exhaust brake includes a variable exhaust restrictor, a pressure sensor for sensing pressure of exhaust gases, a controller operatively connected to the pressure sensor and to the exhaust restrictor so as to adjust opening of the exhaust restrictor during operation of the apparatus so exhaust pressure is sufficient to cause

- 4 -

exhaust valve float prior to bottom dead center of intake strokes of the cylinder, thereby enhancing operation of the compression release brake.

5 According to another aspect of the invention, there is a method for retarding an engine apparatus having a cylinder with an exhaust valve, an intake valve, an intake stroke, an exhaust stroke, a compression stroke and an expansion stroke. The apparatus includes an exhaust brake and a compression release brake. The exhaust brake includes a variable exhaust restrictor, a pressure sensor for sensing pressure of exhaust gases, a controller
10 operatively connected to the pressure sensor and to the exhaust restrictor. The controller adjusts opening of the exhaust restrictor during operation of the apparatus so exhaust pressure is sufficient to cause exhaust valve float prior to bottom dead center of intake strokes of the cylinder, thereby enhancing operation of the compression release brake.

15 The invention offers significant advantages over the prior art. Compared to a conventional compression release brake, it does not require the expensive hardware required to open exhaust valves against the extremely high load of the compressed cylinder charge. However, at low engine speeds engine braking is enhanced because the exhaust restrictor is closed a sufficient amount to maintain a pressure which causes exhaust valve float, and thereby enhances operation of the bleeder brake at low engine
20 speeds as well.

Moreover the invention provides a low-cost engine braking system which can be integrated into overall engine design. Mechanical and thermal components of the engine are not overloaded since the exhaust restrictor can be adjusted below maximum
25 temperature and pressure limits.

Finally, by regulating exhaust pressure, the system ensures relatively quiet brake operation compared with conventional compression release brakes. Thus engine braking systems according to the invention may be utilized in environment sensitive to noise
30 pollution, such as urban areas.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

5

Figure 1 is a diagrammatic view of an internal combustion engine equipped with an engine retarding system according to an embodiment of the invention;

Figure 2 is a sectional view of the hydraulically extensible member thereof;

10

Figure 3 is a sectional view of the rocker arm, adjustment screw and hydraulically extensible member;

15

Figure 4 is a valve lift profile diagram of the engine of Figure 1 equipped with the engine retarding system in the retarding mode; and

Figure 5 is a Pressure-Volume diagram thereof showing the retarding power components of the engine retarding system.

20

DETAILED DESCRIPTIONS OF THE PREFERRED EMBODIMENTS

25

Referring to the drawings and first to Figure 1, this shows an internal combustion engine 10, a diesel engine in this instance, equipped with a plurality of cylinders, only cylinder 12 being shown for simplicity. Each cylinder is provided with a piston 14 which reciprocates therein. Each cylinder has an exhaust valve 16 and an intake valve 18. Each cylinder may have more than one intake valve and/or exhaust valve, but again only one of each is shown for simplicity. The engine also has an intake manifold 20 and an exhaust manifold 22.

30

In the conventional manner exhaust valve 16 is opened by rotation of rocker arm 24 about rocker arm shaft 26 in the direction indicated by arrow 28. The rocker arm is provided

- 6 -

with an adjustment screw 29 capable of adjusting clearance between the rocker arm and the valve.

The exhaust manifold 22 is connected to a turbocharger 34 by an exhaust conduit 36.

5 The turbocharger includes a compressor 38 and a turbine 40. The exhaust gases exit the turbine through conduit 42, which comprises exhaust brake 44. Air compressed by the compressor 38 is carried by a conduit 50 to the intake manifold 20 through charge cooler 52. In this example of the invention the exhaust brake is a Microprocessor Controlled Exhaust Brake as disclosed in PCT Publication No. WO 02/086300 to Anderson et al.,
10 which is incorporated herein by reference, although other variable exhaust restrictions could be substituted. For example, a highly restrictive turbocharger may be employed. This may be a variable wastegate or a variable geometry type. Alternatively the restriction may be placed before or after the turbine. Where the restriction is installed upstream of the turbine, advantage is taken by generating a high-pressure differential
15 across it.

In this example the exhaust restrictor is in the form of a butterfly valve 54 in the exhaust conduit 42. The butterfly is rotated by linkage 56 connected to an actuator 60, a
20 pneumatic actuator in this particular example, although other actuating devices could be substituted. The actuator is actuated by a solenoid valve 62 which communicates with a controller 64. The controller receives pressure and temperature signals 66 and 68 from sensors 70.

Referring to Figures 2 and 3, the rocker arm 24 has a hydraulic extension member 71
25 including a lifter body 72 reciprocatingly mounted within a cylindrical bore 74 and held in by a retainer ring 83. The lifter body has a ball-like end 76 received in socket 78 of exhaust valve interface member 80 which contacts top 82 of the exhaust valve 16. There is a retaining ring 84 which holds the ball and socket assembly together.

30 The lifter body has an internal bore 86 which reciprocatingly receives a plunger 88. Radial clearance 89 is provided between the plunger and the bore. The plunger has a

- 7 -

protrusion 90 which extends above the top 92 of the lifter body by an amount 94 when the plunger is in its uppermost position has shown in Figure 2. There is a retaining ring 96 within the bore which contacts shoulder 98 of the plunger to limit upward movement of the plunger from the point of view of Figure 2. However protrusion 90 is sized to fit through the retaining ring. A hydraulic chamber 91 is located within the bore 86 below the plunger.

There is an internal passageway 100 extending longitudinally through the plunger including a relatively narrow hydraulic conduit 102 adjacent to the top of the plunger, a wider portion 104 below portion 102 and a still wider portion 106 below portion 104. A check valve 110 is located within portions 104 and 106 including a ball 112 within the portion 104. A valve seat 114 for the check valve is formed between the portions 102 and 104. The ball of the check valve is biased upwardly by a coil spring 116 having its bottom within a recess 118 at the bottom of bore 86.

Another coil spring 120 is fitted between shoulder 122, where portions 104 and 106 of passageway 100 meet, and the bottom of the bore. This spring biases the plunger upwardly from the point of view of Figure 4. There is a collar 124 fitted between the springs 116 and 118 within the plunger and which contacts the shoulder 122.

As may be seen, the hydraulic conduit 102 extends through the top 126 of the plunger. A second hydraulic conduit 128 extends through the plunger and intersects the conduit 102 below the top.

During normal engine operation under power, the exhaust restrictor 54 of exhaust brake 44 shown in Figure 1 remains open. However, when the throttle is closed, and engine retarding or braking is desired, the restrictor is closed sufficiently by controller 64, acting through solenoid 62 and actuator 60, to cause valve float of the exhaust valve 16 near the end of the intake stroke for cylinder 12. This valve float is illustrated at 502 in Figure 4.

The degree by which the restrictor is closed is determined by the processor to give sufficient pressure to cause the exhaust valve float. However this is done within

- 8 -

designated exhaust pressure and exhaust temperature limits as sensed by sensors 70 to avoid excess strain or damage to the engine. The controller includes a lookup table of exhaust pressure values which are sufficient to cause valve float of the exhaust valves, but are below maximum pressure values.

5

The amount of exhaust valve gap or lash 136, shown in Figures 1 and 3, increases when the valve floats. The amount 94 of the plunger 88 extending above the top 92 of the lifter body 72, as shown in Figure 2, is greater than the exhaust valve lash. When the valve floats, the plunger 88 moves upwardly, from the point of view of Figure 2, to its uppermost position and hydraulic fluid, in this example engine oil, enters through hydraulic conduit 102 and fills the chamber 91. When the exhaust valve attempts to close after floating, it is held opened by the interface member 80 on the bottom of lifter body 72 which has been extended downwardly to close gap 136 by the upward movement of plunger 88 contacting adjustment screw 29.

15

The radial clearance 89 between the plunger and the bore 86 permits hydraulic fluid to gradually leak out of chamber 91 with continued upward pressure of the exhaust valve. This permits the exhaust valve in this example to effectively close just after the end of the compression stroke as seen at 140 in Figure 4. The valve may close from the bleeder lift prior to the normal exhaust stroke, or the excess lift may bleed out of chamber 91 during opening of the normal exhaust event. The critical thing is that the exhaust valve be closed or nearly closed at the end of the exhaust stroke. The valve may remain open some small amount in the order of .005"-.010".

20

As seen in Figure 4, the main exhaust event 500 and the main intake event 600 occur at their normal times. When the pressure is raised sufficiently in the exhaust manifold by closing the restrictor 54, the force on the back of the exhaust valve 16 overcomes the resisting force of the valve spring 17 seen in Figure 1. Exhaust gases are then forced into the cylinder 12. This charges cylinder 12 prior to the compression stroke. As the exhaust valve 16 moves away from the valve train, the gap 136 shown in Figure 3 is taken up by the upward movement of the plunger 88 and consequent downward movement of lifter

30

- 9 -

body 72. This holds the exhaust valve off its seat for the remainder of the compression stroke as seen at 150 and 152 in Figure 4. As pressure in the cylinder builds, however, the exhaust valve moves back to its reseated position due to the leakage of hydraulic fluid past radial clearance 89 as well as due to compression of the hydraulic fluid within chamber 91. The valve closing by oil compression is recovered as the forces subside, but valve closing by leakage does not recover and lost fluid must be refilled on each engine cycle.

During normal engine operation, under positive power, the restrictor 54 is open and there is no valve float. The hydraulic link comprising lifter body 72 and plunger 88 remains loaded throughout the engine cycle and cannot expand to hold the exhaust valve off its seat. The engine brake is thus disabled.

The engine brake has two performance components. The bleeder brake component comprises the holding open of the exhaust valve by the hydraulic link, or extension member 71 comprising lifter body 72 and plunger 88. This works during the compression stroke, the work being illustrated at 800 in Figure 5. The exhaust brake component, caused by the closing of exhaust restrictor 54, works during the exhaust stroke and is shown at 900 in Figure 5. The total retarding work is represented by the area bounded by the two loops in the curve of the pressure-volume diagram.

It will be understood by someone skilled in the art that many of the details above are given by way of example only and can be altered or deleted without departing from the scope of the invention as set out in the following claims.

- 10 -

WHAT IS CLAIMED IS:

1. An apparatus for retarding an engine having a cylinder with an exhaust valve, an intake valve, an intake stroke, an exhaust stroke, a compression stroke and an expansion stroke, the apparatus including an exhaust brake and a compression release brake, the exhaust brake including a variable exhaust restrictor, a pressure sensor for sensing pressure of exhaust gases, a controller operatively connected to the pressure sensor and to the exhaust restrictor so as to adjust opening of the exhaust restrictor during operation of the apparatus so exhaust pressure is sufficient to cause exhaust valve float prior to bottom dead center of intake strokes of the cylinder, thereby enhancing operation of the compression release brake.
2. The apparatus of claim 1, wherein the compression release brake is a bleeder brake and includes a device for maintaining the exhaust valve open during the compression stroke.
3. The apparatus of claim 2, wherein the engine has a valve opening mechanism for the exhaust valve, said device for maintaining the exhaust valve open including a hydraulic device.
4. The apparatus of claim 3, wherein the valve opening mechanism for the exhaust valve includes a rocker arm, the device for maintaining the exhaust valve open including a hydraulically extendable member mounted on the rocker arm which contacts said exhaust valve.
5. The apparatus of claim 4, wherein the member is reciprocatingly mounted in a cylinder on the rocker arm, a passageway providing hydraulic fluid to the cylinder to extend the member when there is clearance between the member and the valve.

- 11 -

6. The apparatus of claim 5, including a check valve for inhibiting hydraulic fluid flowing from the cylinder to the passageway when the rocker arm moves towards the exhaust valve.

5 7. The apparatus of claim 6 including means permitting controlled leakage of hydraulic fluid from the cylinder during the compression stroke so as to allow the exhaust valve to effectively close at completion of the exhaust stroke.

8. The apparatus of claim 1, wherein the exhaust restrictor is a butterfly valve.

10

9. The apparatus of claim 1, wherein the exhaust restrictor is a variably restrictive turbocharger.

10. The apparatus of claim 2, wherein the device maintains the exhaust valve open throughout the compression stroke.

15

11. The apparatus of claim 1, wherein the controller includes a lookup table of exhaust pressure values which are sufficient to cause said valve float of the exhaust valve, but below a maximum value.

20

12. The apparatus of claim 1, including a temperature sensor for sensing exhaust gas temperatures, the temperature sensor being operatively connected to the controller, the controller adjusting the exhaust restrictor so the exhaust temperature remains below a maximum value.

25

13. A method for retarding an engine apparatus having a cylinder with an exhaust valve, an intake valve, an intake stroke, an exhaust stroke, a compression stroke and an expansion stroke, the apparatus including an exhaust brake and a compression release brake, the exhaust brake including a variable exhaust restrictor, a pressure sensor for sensing pressure of exhaust gases and a controller operatively connected to the pressure sensor and to the exhaust restrictor, the

30

- 12 -

method comprising adjusting the opening of the exhaust restrictor during operation of the apparatus, utilizing the controller and exhaust restrictor, so exhaust pressure is sufficient to cause exhaust valve float prior to bottom dead center of intake strokes of the cylinder, thereby enhancing operation of the compression release brake.

14. The method of claim 13, wherein the compression release brake is a bleeder brake and maintains the exhaust valve open during the compression stroke.

15. The method of claim 14, wherein the engine has a valve opening mechanism for the exhaust valve, the exhaust valve being maintained open hydraulically.

16. The method of claim 15, wherein the valve opening mechanism for the exhaust valve includes a rocker arm, the exhaust valve being maintained opened by a hydraulically extendable member mounted on the rocker arm which contacts said exhaust valve.

17. The method of claim 16, wherein the member is reciprocatingly mounted in a cylinder on the rocker arm, hydraulic fluid being provided through a passageway to the cylinder and extending the member when there is clearance between the member and the valve.

18. The method of claim 17, including a check valve which inhibits hydraulic fluid flowing from the cylinder to the passageway when the rocker arm moves towards the exhaust valve.

19. The method of claim 18 including the step of permitting controlled leakage of hydraulic fluid from the cylinder during the compression stroke so as to allow the exhaust valve to effectively close at completion of the exhaust stroke.

20. The method of claim 13, wherein the exhaust is restricted by a butterfly valve.

- 13 -

21. The method of claim 13, wherein the exhaust is restricted by a variably restrictive turbocharger.
- 5 22. The method of claim 14, wherein the exhaust valve is kept open throughout the compression stroke.
23. The method of claim 14, wherein the controller utilizes a lookup table of exhaust pressure values which are sufficient to cause said valve float of the exhaust valve,
10 but below a maximum value.
24. The method of claim 13, including a temperature sensor for sensing exhaust gas temperatures, the temperature sensor being operatively connected to the controller, the controller adjusting the exhaust restrictor so the exhaust
15 temperature remains below a maximum value.

1/5

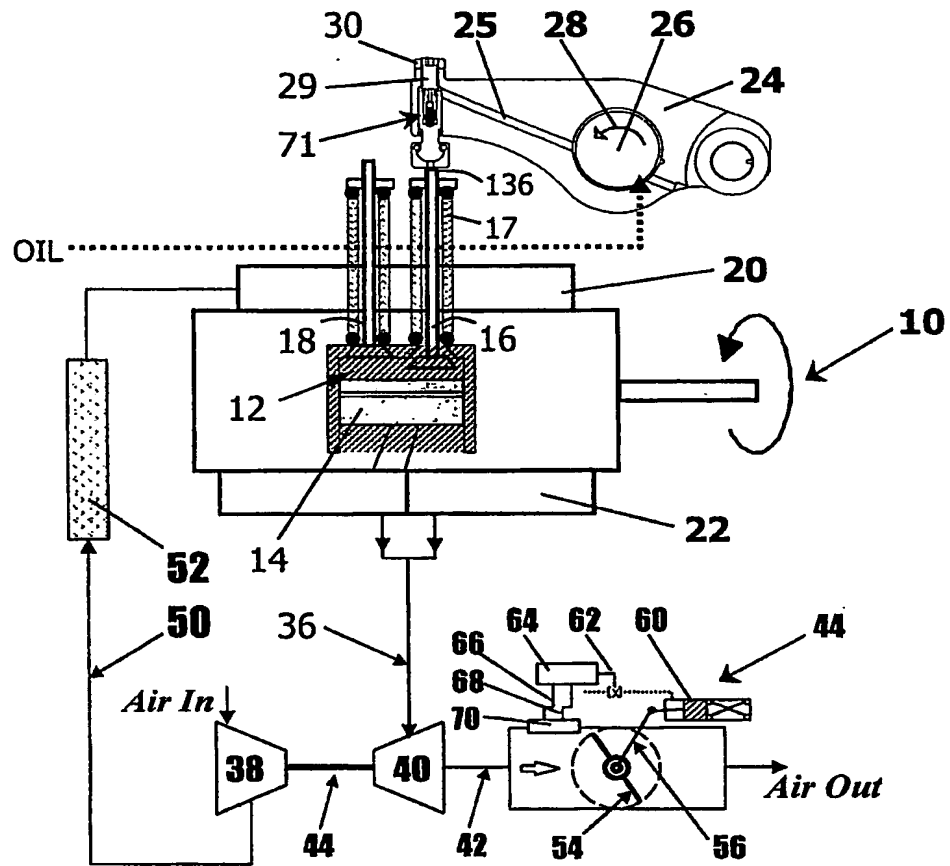


Figure 1

2/5

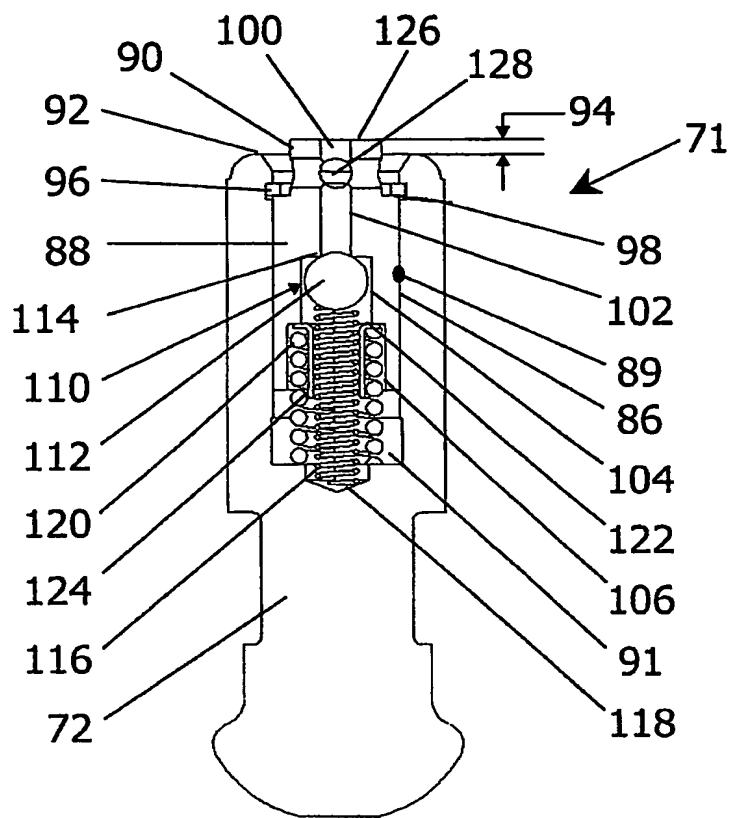
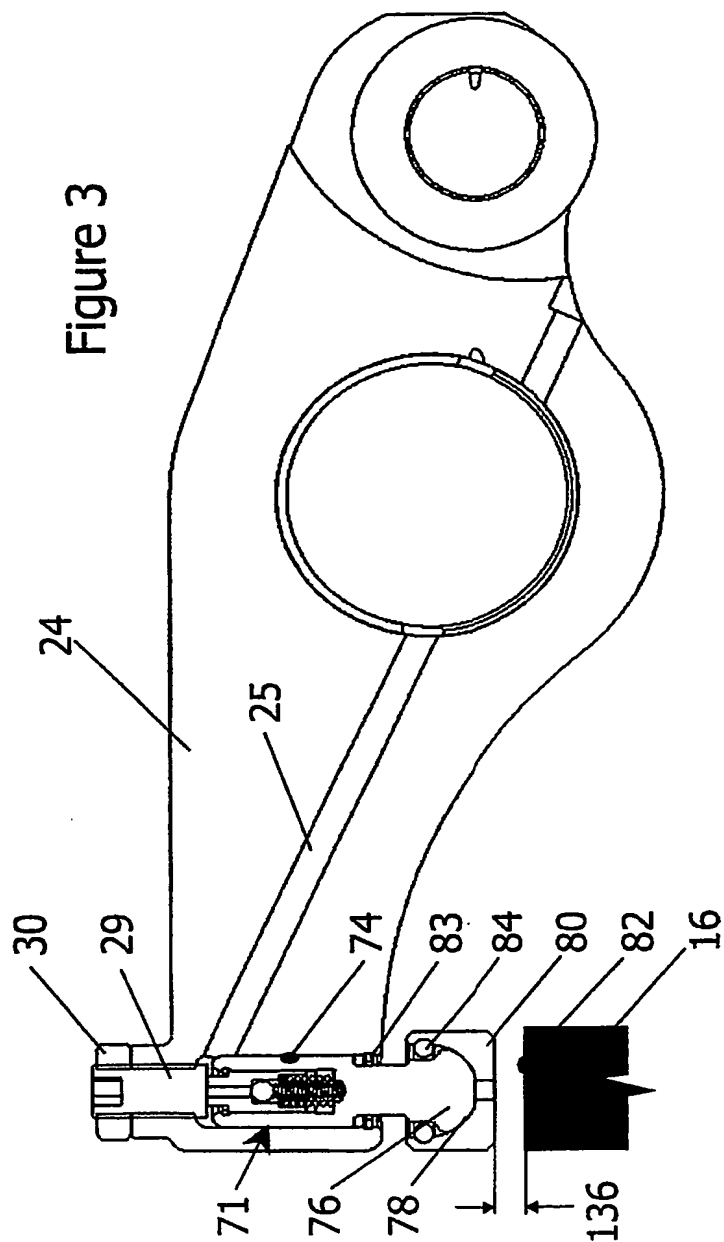


Figure 2

3/5

Figure 3



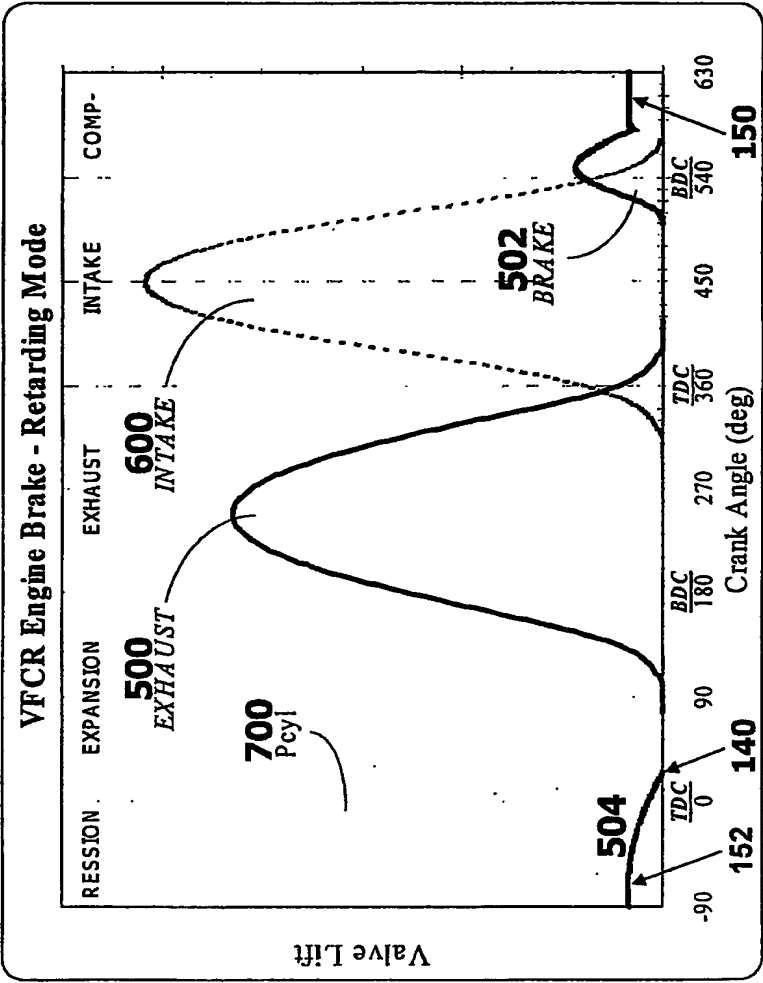


Figure 4

5/5

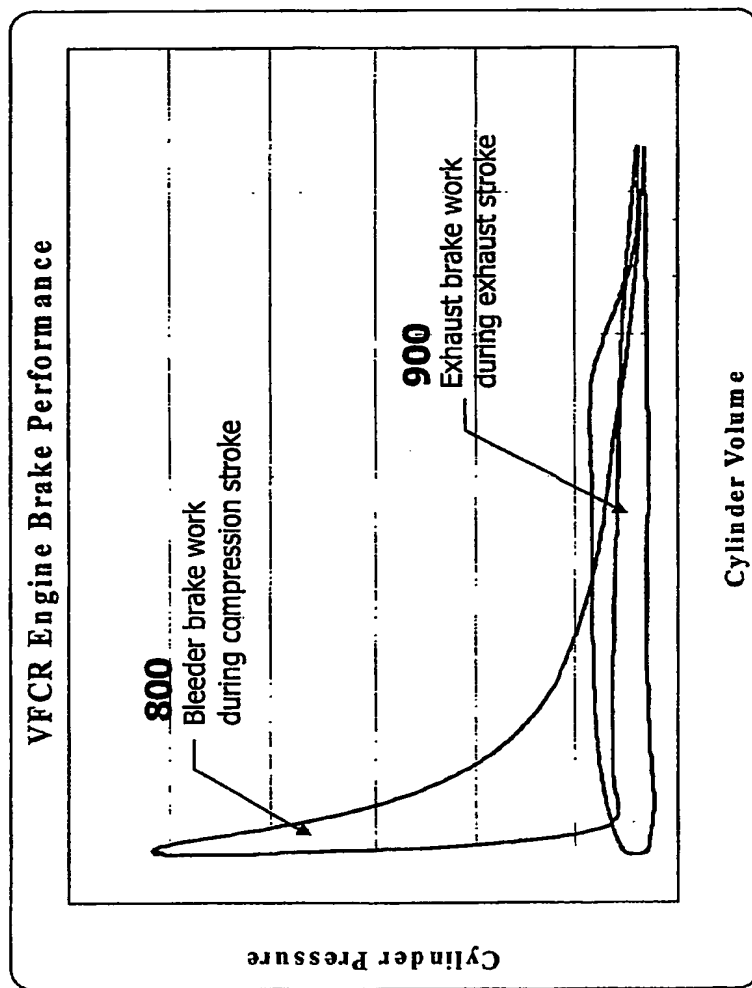


Figure 5

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

Rec'd PCT/PTO 03 SEP 2004




10/506662

(10) International Publication Number
WO 03/074855 A3

- (51) International Patent Classification⁷: F02D 9/06, 13/04, F01L 13/06
- (21) International Application Number: PCT/CA03/00305
- (22) International Filing Date: 4 March 2003 (04.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/361,280 4 March 2002 (04.03.2002) US
- (71) Applicant (for all designated States except US): JENARA ENTERPRISES LTD. [CA/CA]; 19594 - 96th Avenue, Surrey, British Columbia V4N 4C3 (CA).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ISRAEL, Mark, A. [US/US]; 53 Country Corners Road, Amherst, MA 01002 (US). HARTLEY, John, P. [US/US]; 8894 Giles Road, Blaine, WA 98230 (US). MENEELY, Vincent, A. [CA/CA]; 9837 McKinnon Crescent, R.R. No. 10, Langley, British Columbia V3A 6Y5 (CA).
- (74) Agent: CAMERON, Norman, M.; 1401 - 1166 Alberni Street, Vancouver, British Columbia V6E 3Z3 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report: 18 December 2003

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR RETARDING AN ENGINE WITH AN EXHAUST BRAKE AND A COMPRESSION RELEASE BRAKE

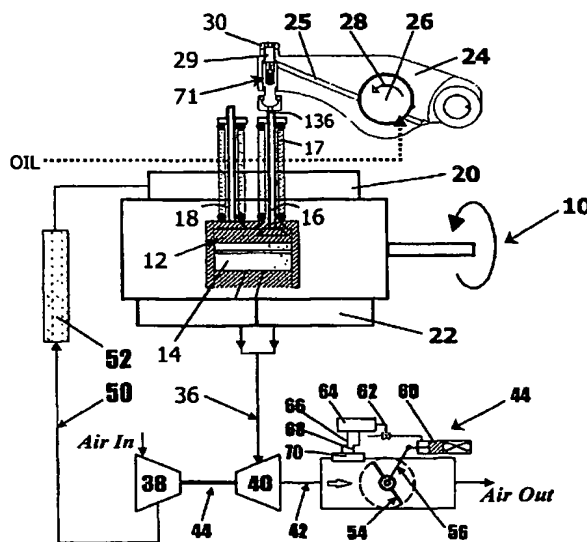

(57) Abstract: An apparatus and method for retarding an engine having a cylinder with an exhaust valve, an intake valve, an intake stroke, an exhaust stroke, a compression stroke and an expansion stroke. The apparatus includes an exhaust brake and a compression release brake. The exhaust brake includes a variable exhaust restrictor, a pressure sensor for sensing pressure of exhaust gases and a controller operatively connected to the pressure sensor and to the exhaust restrictor. Opening of the exhaust restrictor is adjusted during operation of the apparatus so exhaust pressure is sufficient to cause exhaust valve float prior to bottom dead center of intake strokes of the cylinder, thereby enhancing operation of the compression release brake.

WO 03/074855 A3

WO 03/074855 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/00305

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F02D9/06 F02D13/04 F01L13/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F02D F01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	US 2002/174654 A1 (YANG ZHOU) 28 November 2002 (2002-11-28) paragraph '0033! - paragraph '0038! ---	1-11, 13-23
X	US 5 787 858 A (MENEELY VINCENT ALLAN) 4 August 1998 (1998-08-04) column 7, line 8 -column 8, line 55 ---	1-7, 10, 13-19, 22
X	US 6 170 474 B1 (ISRAEL MARK) 9 January 2001 (2001-01-09) column 9, line 65 -column 10, line 11 ---	1, 2, 10, 13, 14, 22
A	EP 0 640 750 A (JACOBS BRAKE TECH CORP) 1 March 1995 (1995-03-01) column 8, line 44 -column 9, line 3; figure 10 --- -/--	1, 13



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the International search

28 August 2003

Date of mailing of the International search report

04/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Raposo, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/00305

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 294 682 A (JACOBS MFG CO) 14 December 1988 (1988-12-14) column 16, line 17 -column 17, line 26 ---	3-7, 15-21
A	US 4 592 319 A (MEISTRICK ZDENEK S) 3 June 1986 (1986-06-03) column 17, line 59 - line 65 ---	1,13
A	US 5 215 054 A (MENEELY VINCENT A) 1 June 1993 (1993-06-01) cited in the application column 6, line 7 - line 28 ---	1,13
A	US 5 086 738 A (KUBIS HERIBERT ET AL) 11 February 1992 (1992-02-11) cited in the application column 6, line 31 -column 7, line 5 -----	1,13

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/CA 03/00305

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2002174654	A1	28-11-2002	WO 02095203 A1 US 2002174849 A1	28-11-2002 28-11-2002
US 5787858	A	04-08-1998	NONE	
US 6170474	B1	09-01-2001	EP 1027533 A1 JP 2003520314 T WO 9918335 A1	16-08-2000 02-07-2003 15-04-1999
EP 0640750	A	01-03-1995	US 5410882 A EP 0640750 A2 JP 7077075 A	02-05-1995 01-03-1995 20-03-1995
EP 0294682	A	14-12-1988	US 4793307 A AT 65289 T AU 595764 B2 AU 1655288 A BR 8802887 A CA 1332551 C CN 1038497 A DE 3863699 D1 EP 0294682 A1 JP 1003243 A MX 163991 B ZA 8803742 A	27-12-1988 15-08-1991 05-04-1990 15-12-1988 17-01-1989 18-10-1994 03-01-1990 22-08-1991 14-12-1988 09-01-1989 07-07-1992 12-12-1988
US 4592319	A	03-06-1986	AT 45408 T AT 61080 T AT 95279 T AU 578204 B2 AU 5796886 A BR 8602544 A CA 1271675 A1 CN 86103699 A DE 3664945 D1 DE 3677784 D1 DE 3689126 D1 DE 3689126 T2 DK 242686 A EP 0211170 A1 EP 0302288 A1 EP 0396154 A2 ES 8707327 A1 ES 8801421 A1 ES 8800394 A1 IE 922012 L IN 165794 A1 IN 168930 A1 JP 1704446 C JP 3066492 B JP 62038813 A MX 162178 A NO 862153 A NZ 216294 A ZA 8603774 A	15-08-1989 15-03-1991 15-10-1993 13-10-1988 12-02-1987 17-03-1987 17-07-1990 04-02-1987 14-09-1989 04-04-1991 04-11-1993 03-03-1994 10-02-1987 25-02-1987 08-02-1989 07-11-1990 01-10-1987 01-03-1988 01-01-1988 09-02-1987 13-01-1990 13-07-1991 27-10-1992 17-10-1991 19-02-1987 05-04-1991 10-02-1987 31-08-1987 28-01-1987
US 5215054	A	01-06-1993	WO 9428290 A1 AU 4057893 A	08-12-1994 20-12-1994

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No
PCT/CA 03/00305

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5086738	A	11-02-1992	DE 4007287 A1	12-09-1991
			AT 96500 T	15-11-1993
			DE 59100515 D1	02-12-1993
			EP 0446577 A1	18-09-1991
			JP 4224215 A	13-08-1992
			RU 2033548 C1	20-04-1995
